


UNDERGROUND CONDUIT SPECIFICATION (SCH. 40 PVC)

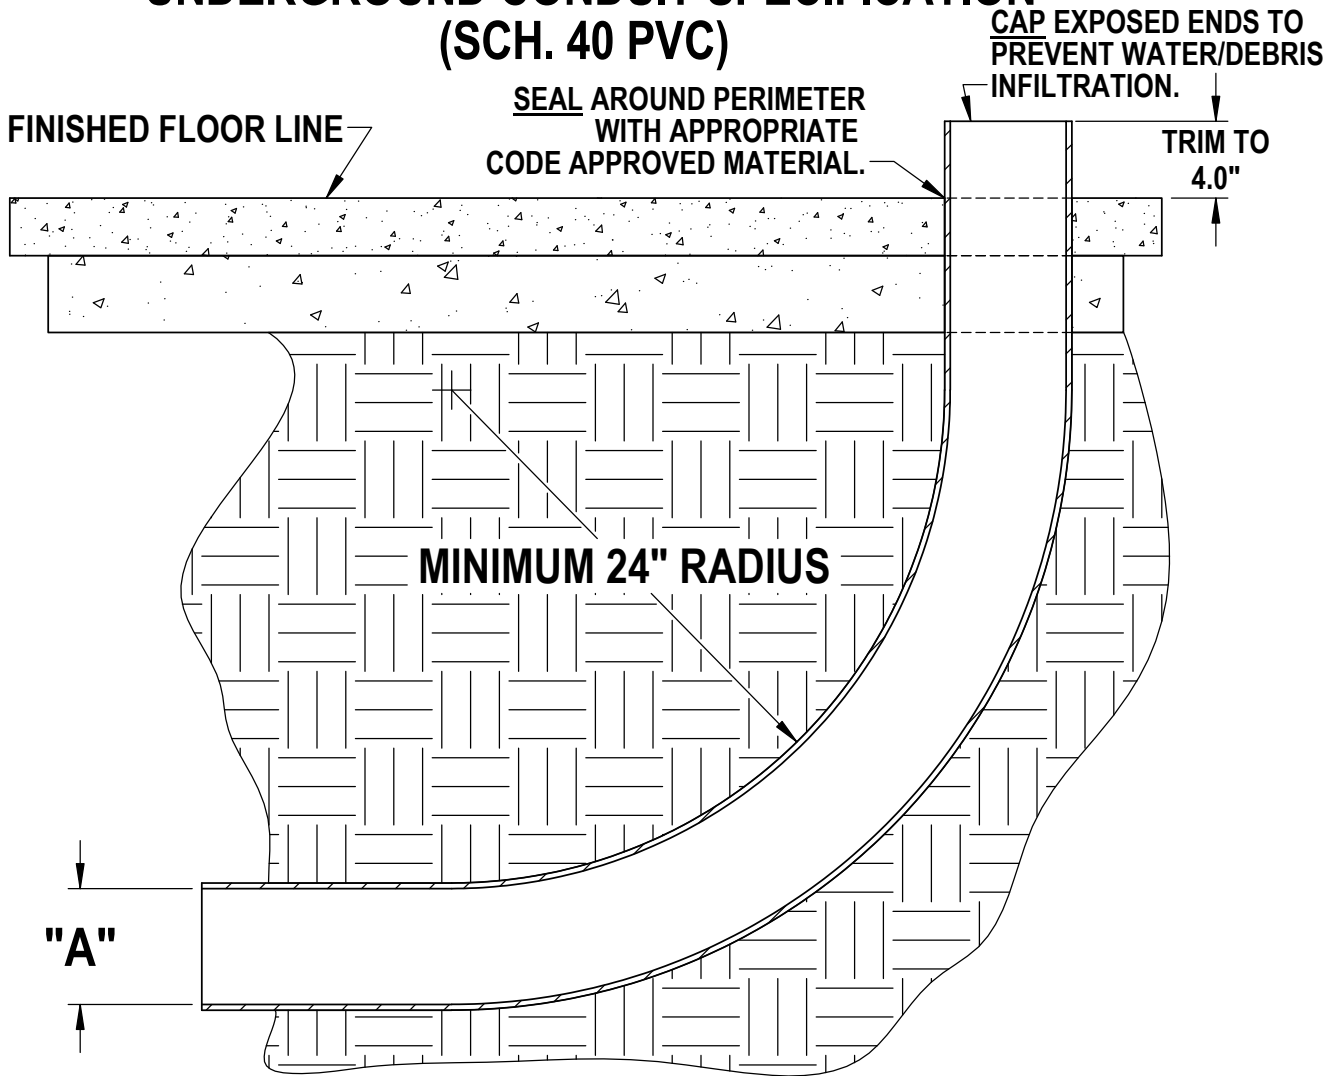

"A" (MIN. INSIDE DIA.)	MAXIMUM TRUNK HOUSING LINE QTY.
6.0"	2 - 12 LINES
8.0"	16 - 24 LINES

- ALL JOINTS MUST BE SOLVENT CEMENTED IN ACCORDANCE WITH PVC MANUFACTURERS RECOMMENDATIONS TO GUARANTEE A WATERTIGHT CHASE.
- ONLY "ONE" 24" OR 30" RADIUS SWEEP BEND (45° OR 90°) MAY BE USED AT EACH END OF CHASE.
CAUTION: PLUMBING STYLE PVC SHORT RADIUS FACTORY "ELLS" ARE NOT ACCEPTABLE.
- CONDUIT MUST BE CAPPED AND SEALED AT BOTH ENDS DURING CONSTRUCTION.
- INSTALLER MUST TRIM EXPOSED ENDS TO FOUR (4") INCHES ABOVE FINISHED FLOOR DURING PRODUCT LINE INSTALLATION.
- AFTER PRODUCT LINES ARE INSTALLED OPEN ENDS MUST BE SEALED PER LOCAL HEALTH AND FIRE CODES.

ADDED CONDUIT TABLE		
A	10/30/2020	AJP
REVISIONS		

SCALE	NOT TO SCALE	
DRAWN	JRB	DATE 4/20/2004

70118



Perlick Corporation
Milwaukee, WI 53223